

# PX24500 DMX Driver (SDL/PX24500)

The SDL PX24500 is designed to be connected to either lighting control systems via the DMX output or DMX lighting desks. The SDL PX24500 is a constant voltage DMX 512 LED driver and is capable of driving either 12 or 24Vdc LED products in conjunction with a DMX signal and a suitable power supply. The SDL PX24500 is fully addressable using the DIP switches on the side.



## SPECIFICATION

<b>Part No.</b>	SDL/PX24500
<b>Supply Voltage</b>	12/24Vdc
<b>Output</b>	3 Channel
<b>Output Current (per channel)</b>	5 Amp
<b>Size (LxWxH)</b>	177mm x 41mm x 33mm
<b>Address Setting</b>	1-10 DIP Switches
<b>Drive Capability</b>	5050/30/RGB 24m Max*
<i>With suitable power supply</i>	5050/60/RGB 12m Max*


\* Additional lengths can be driven using the SDL-RP316

## DMX 512 ADDRESS SETTINGS

The DIP switches are used to set the binary value of the DMX 512 address to receive data.

DIP	1	2	3	4	6	7	8	9
<b>Value</b>	1	2	4	8	32	64	128	256

## DIMENSIONS

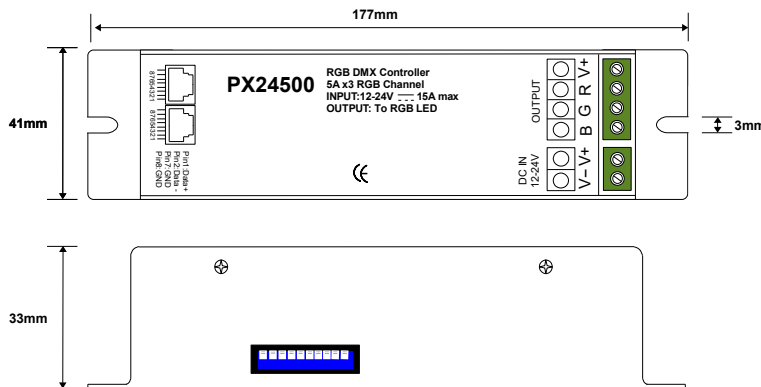

## FRONT DETAIL

