



# Medium Brightness

(3528/120/) (3528/120/IP67)

Our medium brightness is a versatile flexible LED strip. The surface mount Epistar LED's are on a 8mm wide flexible white PCB with 3M adhesive tape on the rear to allow quick and easy installation. This product is compatible with our range of LED controllers & power supplies.



## SPECIFICATION

Part No: 3528/120 (WW, NW, PW, R, B, G)  
3528/120/IP (WW, NW, PW, R, G, B)

Voltage: 12Vdc

Power/m: 9.6W/m

LED Qty: 120 per meter

Colours Available: Warm White, Natural White,  
Pure White, Red, Green, Blue


Cutting Interval: 25mm (every 3 LED's)

Illumination Angle: 120


Lumen: Kelvin:

Warm White	- 700-750	3000K
Natural White	- 750-800	4000K
Pure White	- 800-850	6000K
Red	-	N/A
Green	-	N/A
Blue	-	N/A
Yellow	-	N/A


## DIMENSIONS IP20

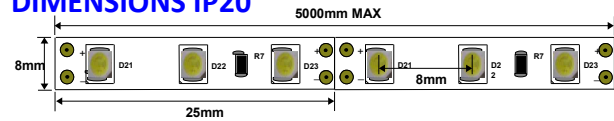


## DIMENSIONS IP67

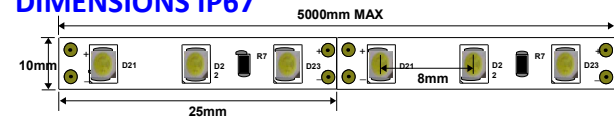

**EPISTAR®**  
Brand LED 3528 SMD

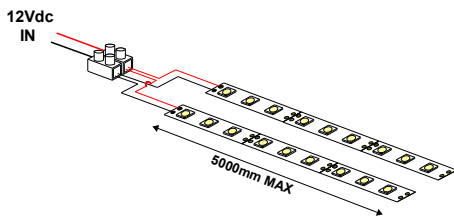

Multiple runs of up to 5000mm can be added.  
DO NOT EXCEED PSU LIMIT

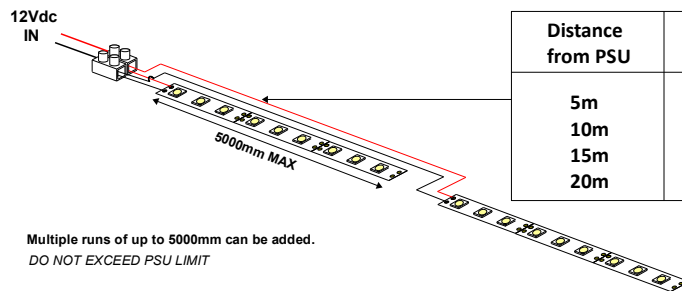

Multiple runs of up to 5000mm can be added.  
DO NOT EXCEED PSU LIMIT